


Disc Harrows are designed with durable and rigid 3" (3 1/2" on model D-21) tubular frames holding gangs firmly in place. Wide range of cutting angles easily adjusted for maximum protection. Hitch places low for good rear gang penetration and handling. Cutout disc blades mounted on front and rear. Axle bearings are sealed for long life protection.

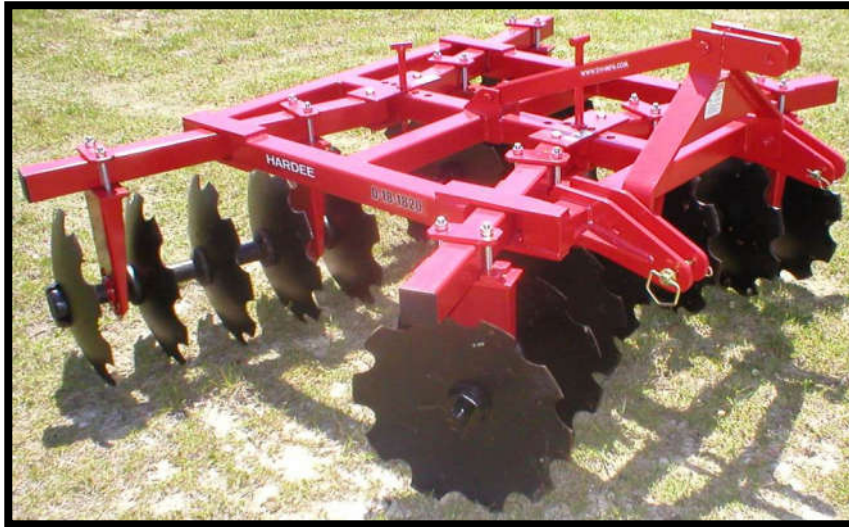

SPECIFICATIONS

Model	Cut Width	Front Disc	Rear Disc	Spacing		Blade Diameter	Approx. Weight	Hitch	*Suggested Minimum H.P.
				Front	Rear				
D-18-1618	5-1/2'	8	8	9"	9"	18"	773 lbs.	Cat. 1	25-30
D-18-1620	5-1/2'	8	8	9"	9"	20"	840 lbs.	Cat. 1	25-30
D-18-1622	5-1/2'	8	8	9"	9"	22"	920 lbs.	Cat. 1	25-30
D-18-1820	6-1/2'	8	10	9"	7-1/2"	20"	870 lbs.	Cat. 1	25-30
D-18-2020	6-1/2'	10	10	7-1/2"	7-1/2"	20"	900 lbs.	Cat. 1	25-30
D-20-2020	7-1/2'	10	10	9"	9"	20"	990 lbs.	Cat. 1&2	30-40
D-20-2022	7-1/2'	10	10	9"	9"	22"	1,090 lbs.	Cat. 1&2	30-40
D-20-2220	8'	10	12	9"	7-1/2"	20"	1,020 lbs.	Cat. 1&2	30-40
D-20-2222	8'	10	12	9"	7-1/2"	22"	1,130 lbs.	Cat. 1&2	40-45
D-21-2420	9'	12	12	9"	9"	20"	1,500 lbs.	Cat. 2	45-55
D-21-2422	9'	12	12	9"	9"	22"	1,600 lbs.	Cat. 2	45-55

* Suggested minimum H.P. may vary depending upon composition of soil, gang angle and condition of tractor

Available Options

Rear Blade Extensions - Highway Safety Reflector

****PLEASE CONTACT LOCAL DEALER FOR MORE INFORMATION****

4895 Red Bluff Road, Loris SC 29569
www.hardeebyevh.com

Phone: (843)756-2555 Fax: (843)756-4436
evhmfg@hardeebyevh.com

Disc Harrows are designed with durable and rigid 3 1/2" tubular frames holding gangs firmly in place. Wide range of cutting angles easily adjusted for maximum protection. "Clevis" type hitch placed low for easy handling. Cutout disc blades located on front and rear. Hydraulic cylinder used to raise and lower transport wheel. 9.5L tires and tubes. Axle bearings are sealed for long life protection.



SPECIFICATIONS

Model	Cut Width	Front Disc	Rear Disc	Spacing		Blade Diameter	Approx. Weight	Hitch	*Suggested Minimum H.P.
				Front	Rear				
D-22-2420	9'	12	12	9"	9"	20"	1,830 lbs	CLEVIS	55
D-22-2422	9'	12	12	9"	9"	22"	1,950 lbs	CLEVIS	60
D-23-2820	10-1/2'	14	14	9"	9"	20"	2,375 lbs	CLEVIS	65
D-23-2822	10-1/2'	14	14	9"	9"	22"	2,475 lbs	CLEVIS	70
D-23-3220	12'	16	16	9"	9"	20"	2,500 lbs	CLEVIS	75
D-23-3222	12'	16	16	9"	9"	22"	2,630 lbs	CLEVIS	80
D-23-3224	12'	16	16	9"	9"	24"	2,820 lbs	CLEVIS	90

* Suggested minimum H.P. may vary depending upon composition of soil, gang angle and condition of tractor

Available Options

Rear Blade Extensions - Blade Scraper Set For Front or Rear
 Dual Transport Wheels (Standard on all D-23 Models) - Highway Safety Reflector

****PLEASE CONTACT LOCAL DEALER FOR MORE INFORMATION****

4895 Red Bluff Road, Loris SC 29569
www.hardeebyevh.com

Phone: (843)756-2555 Fax: (843)756-4436
evhmfg@hardeebyevh.com